

## VST 40 PALLETIZER

This palletizer is designed to offer a high level of stacking performance with minimal manual labor. Its sturdy design results in a very low maintenance interval. It can reach a capacity of 36 bags per minute. This high performance machine is equipped with servo-drives. The manipulator positions your product with the utmost accuracy on the formation slides, allowing for the overlapping of bags. The formation slides are an indispensable feature to ensure a high capacity as well as great stability. The automatic pallet in-feed ensures an automated process which saves on labor costs.

The user friendly controls are very intuitive. The free-programmable controls offer a setup that meets all of your requirements. Your settings can be changed and stored in the controls.



### FEATURES

- Capacity of up to 36 bags per minute
- Automatic pallet in-feed & out-feed system with wrapper
- Stacking patterns are free-programmable
- Enclosed four-sided stacking chamber
- Touchscreen for easy operation
- Standard LAN connectivity for remote access

### SPECIFICATIONS

- Pallet Sizes: Any pallet up to 5'3" (1600 mm)
- Maximum stacking height of 8'2" (2500mm) including pallet
- Air Consumption varies based on options chosen
- Power: 480 Volt, 3 Phase, Ground, 60 Hz





### OPTIONS

- Enclosed stacking console
- Dual purpose manipulator for handling both bags and cartons
- Electrical adjustable stacking collar

### BAG & CARTON SPECIFICATIONS

MANIPULATOR	ONE	TWO	THREE	CARTON
MINIMUM WEIGHT	11lbs/5kg	55lbs/25kg	22lbs/10kg	2.2lbs/1kg
MAXIMUM WEIGHT	55lbs/25kg	55lbs/25kg	110lbs/50kg	55lbs/25kg
WIDTH	18.1in/460mm	20.9in/530mm	23.2in/590mm	15.8in/400mm
LENGTH	30.3in/770mm	30.3in/770mm	34.7in/880mm	23.6in/600mm

# VST 40 PALLETIZER

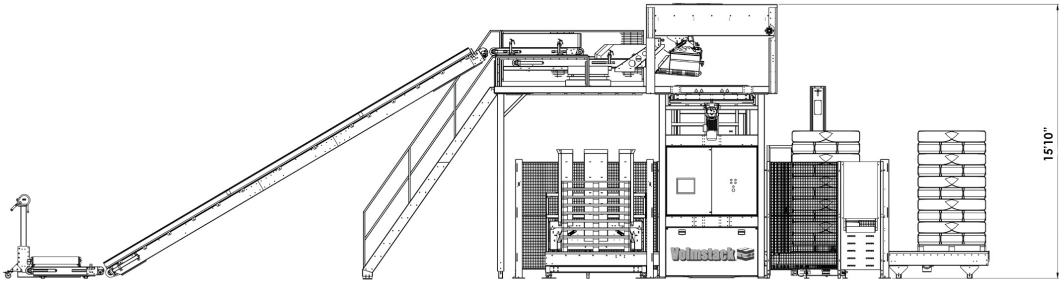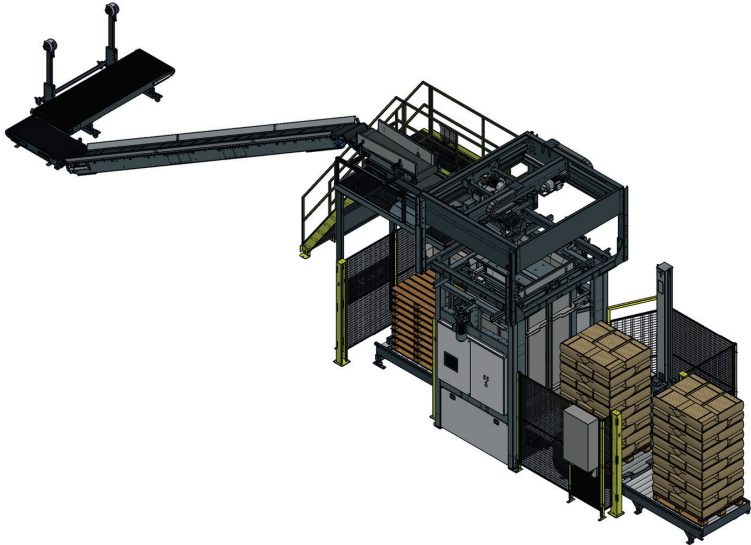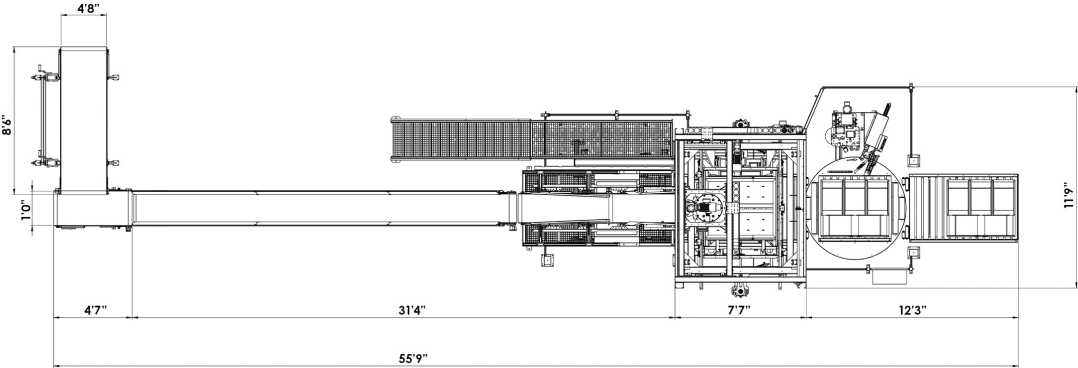

Measurements are rounded off to the nearest inch.